
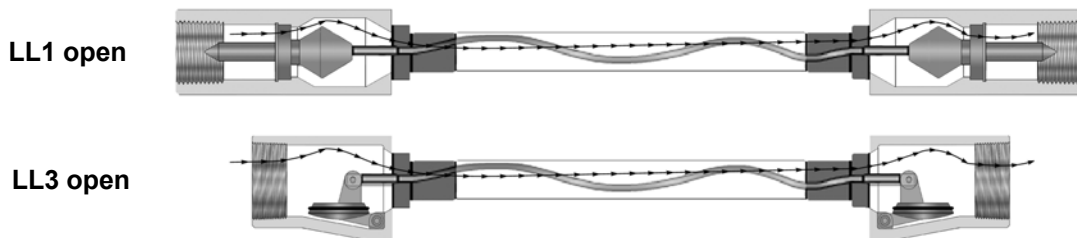


**Smart-Hose™****FLUID SYSTEMS**

ENGINEERING DATA

## C02 Transfer Hose

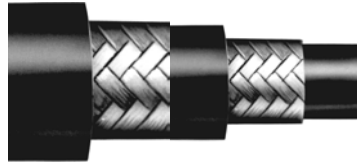

The Smart-Hose safety system is built into a special rubber Carbon Dioxide discharge hose. Common uses include in-plant, truck and rail car loading. This low temperature hose has been uniquely developed to meet the rugged requirements of this application.

### Hose Data

- Cover** Black, Special low temperature abrasions resistant co-polymer
- Reinforcement** 2 layers of stainless steel wire braid
- Tube** Black, Special low temperature co-polymer resistant to C02 permeation
- Branding** Orange Mylar brand – C02 Discharge
- Temperature** -65° to 180° F (-55° to 83° C)
- Maintenance** See Smart-Hose "Proper Use, Care & Maintenance" Booklet Form# 1999-1

ID	WP	Hose	Coupling		Part #
	psi	Wt/Ft	Weight LL	Weight LL3	
1"	450	.8 lb	2.5 lb		R33008140000
1.5"	450	1.2 lb		3.4 lb	R33012140000
2"	450	1.5 lb		4.7 lb	R33016330000