


Smart-Hose™

FLUID SYSTEMS


ENGINEERING DATA

Metal Hose – 316

STAINLESS STEEL

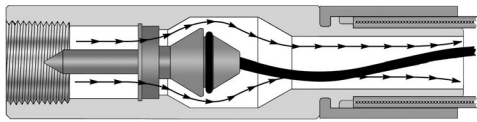

Lifeline 1

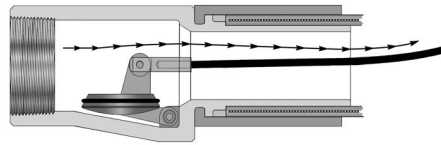

Lifeline 3



Single Braid



Double Braid

The Smart-Hose Safety System is built into a stainless steel metal hose to prevent or eliminate the catastrophic consequences of a hose separation resulting from a pull away or major hose rupture. In the event of such an occurrence, the Smart-Hose Safety System will shut off the flow of product in both directions instantly upon hose separation.

This type hose is an excellent choice for liquid and gaseous chemicals, along with compressed air, petroleum and other products requiring the chemical resistance of 312 stainless steel.

Each hose is welded by the manufacturer in accordance with their specifications and 100% pressure tested with dried air under water to insure assembly safety. Each serial numbered assembly has a test certification and instruction booklet attached. Mass-spectrometer testing is supplied on request for all hazardous material transfer service hoses. (2" ID and larger hose can have a Flex Guard installed to guard against over bending at the coupling.)

- Each hose is tested with dry air or nitrogen to test pressure
- Each hose is serial numbered and has test certificate and Operating Booklet
- Hose can be made to meet DOT - E 12325 (special rail car unloading exemption eliminates the requirement for continuous human monitoring during load and unloading).
- Hose can be made to meet DOT HM225/49CFR173.315

Hose Data

Tube	316 Stainless Steel										
Braid	321 & 304 Stainless Steel (1 or 2 braids)										
Welds	Performed by the manufacturer with ANSI code 9 welders										
Testing	Proof testing by manufacturer, second pressure test by Smart-Hose to a minimum of 1.5 working pressure based on specification										
Temperature	Cryogenic to +450°F (Cryogenic to +230°C)										

ID	1 Braid WP psi	2 Braid WP psi	1 Braid Hose Wt./Ft.	2 Braid Hose Wt./Ft.	1 Braid Static Bend Radius	2 Braid Static Bend Radius	1 Braid Intermittent Bend Radius	2 Braid Intermittent Bend Radius	Cplg. Lgth.	Cplg. Type	Cplg. Wt. Ea.
1/2"	1050	1575	0.41	0.54	1.5"	1.5"	6.5"	6.5"	3"	LL1	12.7 oz
3/4"	880	1410	0.67	0.85	2"	2"	8"	8"	3.5"	LL1	1.62 lb
1"	605	970	0.97	1.19	2.75"	2.75"	8"	8"	4"	LL1	2.50 lb
1 1/2"	525	790	1.96	2.36	3.75"	3.75"	10"	10"	4.25"	LL3	3.4 lb
2"	455	730	2.21	2.82	5"	5"	14"	14"	5"	LL3	4.7 lb
3"	290	405	2.63	3.46	7"	7"	18"	18"	6.9"	LL3	7.1 lb
4"	285	350	3.3	4.5	11"	11"	22"	33"	6.9"	LL3	12.1 lb
6"	240	299	6.2	8.0	16.5"	16.5"	33"	41"	6.9"	LL3	44.5 lb

Rev 01/02

2536 South 59th Street • Philadelphia, PA 19143

Phone

Fax

Toll-Free